



SMD Power Inductors - SESI 14SR High Reliability Applications

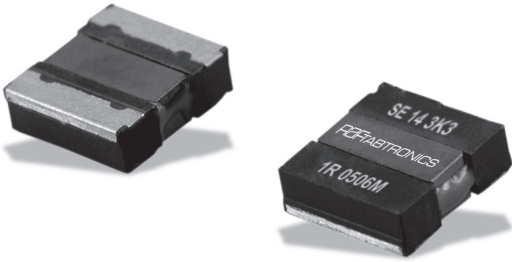

- Energy storage, smoothing, filtering
- Applied standards: MIL-PRF-27 Class V Grade 5 capable ECSS-Q-70-02, DO-160
- **eesa** ESCC 3201/009 versions upon request
- Materials meet UL94-V0 rating
- Suited for IR and vapor reflow soldering
- Frequency range up to 1 MHz
- Operating ambient temperature range : - 55 °C to + 125 °C
- Weight : 2 grams typical

Notes


1. Inductance at 0.25 V, 100 kHz
2. I rated (permanent DC) without heatsink ; mounted via heatsink I=I rated x1.4
3. Typical inductance value at recommended rated current
4. I peak max = maximum peak value of current at +125 °C; L value not guaranteed
5. 40 % admissible I ripple over I rated at f=200 kHz
6. Isolation voltage 150 Vdc
1 min electrification 100 GΩ minimum between winding and magnetic core

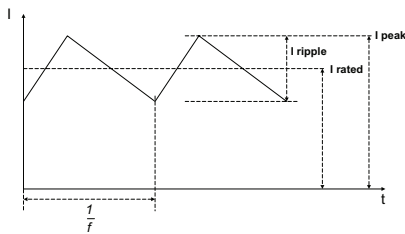

Connections



Marking




yyww :
Date code

Electrical Data (25°C)

ID Code	L ¹ no load μH	I ² rated A	L ³ at rated I μH	I ⁴ peak max A	Rdc at 25°C mΩ Max	L Tol. ± %
SESI 14 3K3 1SR	3.3	5.8	2.3	8.0	15.0	20
SESI 14 4K7 1SR	4.7	5.4	3.3	6.9	17.5	
SESI 14 6K0 1SR	6.0	4.3	4.2	5.7	26.5	
SESI 14 8K2 1SR	8.2	3.7	5.7	5.2	42	
SESI 14 10K 1SR	10	3.3	7.0	4.6	47	
SESI 14 15K 1SR	15	2.7	10.5	3.8	90	
SESI 14 22K 1SR	22	2.2	15.4	3.0	110	
SESI 14 33K 1SR	33	1.8	23.1	2.5	170	
SESI 14 47K 1SR	47	1.6	32.9	2.1	200	
SESI 14 56K 1SR	56	1.5	39.2	1.9	240	
SESI 14 68K 1SR	68	1.3	47.6	1.7	290	
SESI 14 82K 1SR	82	1.2	57.4	1.5	315	10
SESI 14 M10 1SR	100	1.1	70	1.4	440	
SESI 14 M12 1SR	120	1.0	84	1.3	500	
SESI 14 M15 1SR	150	0.9	105	1.1	645	
SESI 14 M18 1SR	180	0.83	126	1.0	740	
SESI 14 M22 1SR	220	0.72	154	1.0	980	
SESI 14 M33 1SR	330	0.57	231	0.8	1575	

Dimensions (mm, bottom view)




PCB Layout (suggested)



Packaging (mm, top view)

Tape and Reel:
400 pieces per reel of diameter 330 mm

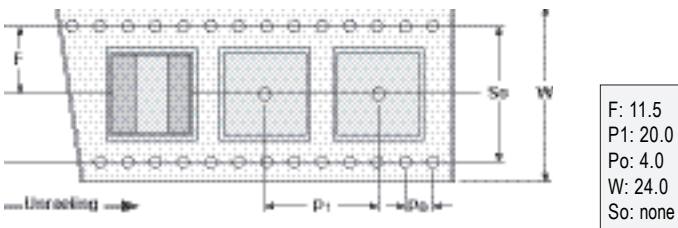

To Order

SESI	14	###	1	S	R
SMD Energy Storage Inductor	Size	Value code 4K7 = 4,7 μH M10 = 100 μH 1M0 = 1000 μH	Version	SMD Terminals	High reliability

SESI 14 ### 1SR

RAFTABTRONICS
Technology to the global power

Tel: 1-888-876-6424
Fax: 1-585-243-3831
sesi@raftabtronics.com
www.raftabtronics.com

Performance warranty of products offered on this data sheet is limited to the parameters specified. Data is subject to change without notice. Other brand and product names mentioned herein may be trademarks or registered trademarks of their respective owners. © Copyright 2010. RAF Tabtronics LLC. All rights reserved.