



SMD Power Inductors - SESI 15SR High Reliability Applications

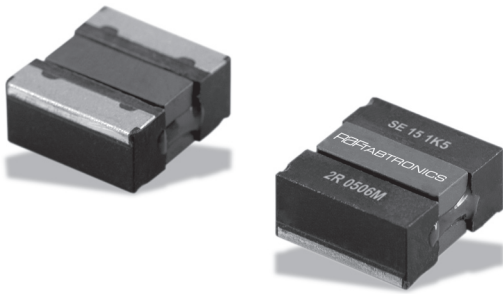

- Energy storage, smoothing, filtering
- Applied standards : MIL-PRF-27 Class V Grade 5 capable ECSS-Q-70-02, DO-160
- **es** ESCC 3201/009 versions upon request
- Materials meet UL94-V0 rating
- Suited for IR and vapor reflow soldering
- Frequency range up to 1 MHz
- Operating ambient temperature range: -55 °C to +125 °C
- Weight: 4.2 grams typical

Notes


1. Inductance at 0.25 V, 100 kHz
2. I rated (permanent DC) without heatsink ; mounted via heatsink I = I rated x 1.4
3. Typical inductance value at recommended rated current
4. I peak max = maximum peak value of current at +125 °C; L value not guaranteed
5. 40 % admissible I ripple over I rated at f = 200 kHz
6. Isolation voltage 500 Vdc
1 min electrification 100 GΩ minimum between winding and magnetic core

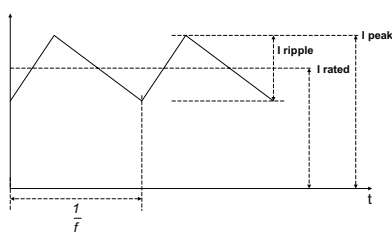

Connections




Marking



yyww :
Date code

Dimensions (mm, bottom view)




PCB Layout (suggested)



Packaging (mm, top view)

Tape and Reel:
400 pieces per reel of diameter 330 mm

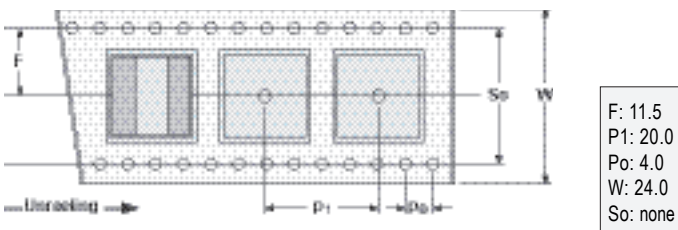

Electrical Data (25°C)

ID Code	L ¹ no load μH	I ² rated A	L ³ at rated I μH	I ⁴ peak max A	Rdc at 25°C mΩ Max	L Tol. ± %
SESI 15 1K5 2SR	1.5	14	0.9	19	5.0	30
SESI 15 1K8 1SR	1.8	10	1.05	14	5.0	
SESI 15 2K7 1SR	2.7	8.2	1.9	11.5	6.5	
SESI 15 4K9 1SR	4.9	6.0	3.4	8.5	11	20
SESI 15 6K4 1SR	6.4	5.3	4.5	7.5	12	
SESI 15 8K0 1SR	8.0	4.8	5.6	6.5	16	
SESI 15 12K 1SR	12	4.0	8.4	5.5	23	
SESI 15 16K 1SR	16	3.4	11.2	4.5	27	
SESI 15 18K 1SR	18	3.1	12.6	4.2	29	
SESI 15 21K 1SR	21	2.9	14.7	4.0	36	10
SESI 15 27K 1SR	27	2.6	18.9	3.5	44	
SESI 15 29K 2SR	30	2.6	20	3.5	72	
SESI 15 33K 1SR	33	2.3	23	3.2	59	
SESI 15 48K 1SR	48	1.9	33	2.7	72	
SESI 15 56K 1SR	56	1.8	39	2.5	82	
SESI 15 68K 1SR	68	1.6	47	2.2	110	
SESI 15 82K 1SR	82	1.5	57	2.1	120	
SESI 15 M10 1SR	100	1.35	70	1.9	155	
SESI 15 M12 1SR	120	1.2	84	1.7	180	
SESI 15 M15 1SR	150	1.1	105	1.5	230	
SESI 15 M22 1SR	220	0.9	154	1.3	355	
SESI 15 M33 1SR	330	0.74	231	1.0	630	
SESI 15 1M0 1SR	1000	0.38	800	0.5	2127.5	
SESI 15 2M3 1SR	2290	0.28	1900	0.36	4400	

To Order

SESI	15	###	#	S	R
SMD Energy Storage Inductor	Size	Value code 4K9 = 4,9 μH M10 = 100 μH 1M0 = 1000 μH	Version	SMD Terminals	High reliability

RAFTABTRONICS
Technology to the global power

Tel: 1-888-876-6424
Fax: 1-585-243-3831
sesi@raftabtronics.com
www.raftabtronics.com

Performance warranty of products offered on this data sheet is limited to the parameters specified. Data is subject to change without notice. Other brand and product names mentioned herein may be trademarks or registered trademarks of their respective owners. © Copyright 2010. RAF Tabtronics LLC. All rights reserved.